
Double Sliding Pocket Door System Wiring/Socket Ready


CLASSIC LUCE DOUBLE - wiring ready

•



DOUBLE POCKET DOORS SYSTEM

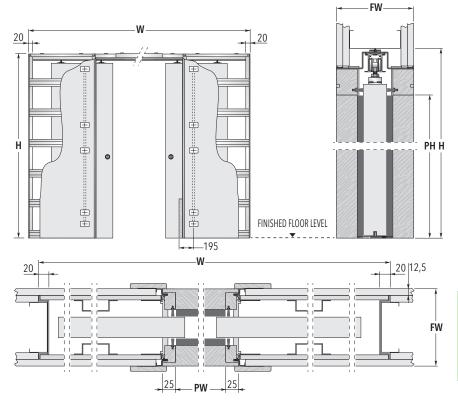



Note: Non standard sizes on request

PLEASE NOTE. ECLISSE advise you build a 3-5mm tolerance into your stud dimensions for both width and height to ensure a good fit, use packers at all fixing points to ensure the system is installed plumb, level and square.

FRAMES FOR DOUBLE DOORS			DOOR PANELS UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION W x H	FINISHED WALL FW	DW	DH
1200 x 2030	2528 x 2115	150	626	2040
1400 x 2030	2928 x 2115	150	726	2040
1600 x 2030	3328 x 2115	150	826	2040
1800 x 2030	3728 x 2115	150	926	2040
2000 x 2030	4128 x 2115	150	1026	2040
1170 x 1971	2498 x 2056	150	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
1322 x 1971	2850 x 2056	150	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
1474 x 1971	3202 x 2056	150	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
1626 x 1971	3354 x 2056	150	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
1800 x 1971	3728 x 2056	150	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	
1350 x 1971	2878 x 2056	150	2ft. 4in. x 6ft. 6in. (711 x 1981 mm)	
1550 x 2020	3278 x 2105	150	2ft. 8in. x 6ft. 8in. (813 x 2032 mm)	
1700 x 2020	3628 x 2105	150	2ft. 10in. x 6ft. 8in. (864 x 2032 mm)	

Dimensions are given in mm



NOTES

- Non standard sizes available up to PW 2600 x PH 2600mm.
- Suitable for 35 to 44mm thick doors.
- Standard double units have the possibility to use sockets on both sides of one pocket, both pockets on request.
- ► Maximum socket depth 44mm.
- ▶ Doors, plasterboard and final architrave not supplied.
- ▶ When fitting flush pull handles we recommend the stop be regulated so the door protrudes from the pocket to avoid risk to fingers.
- Should the door be set to enter the pocket completely we do not accept any liability.
- ▶ The framework is not designed to take heavy loads such as radiators etc.
- Install at finished floor level.
- Max door weight 100 kg (150 kg on request).



ACCESSORIES

▶ Door Furniture

Flush pulls and bathroom locks

► ECLISSE BIAS

Soft close up to 40 kg with anti-slam

ECLISSE BIAS DS

Bi-directional soft close up to 40 kg with anti-slam

Soft Close

Slide the door towards the close position, the soft close takes over

► Double door Co-ordination

Doors open and close simultaneously



Sliding Pocket Door Systems